




235.1.

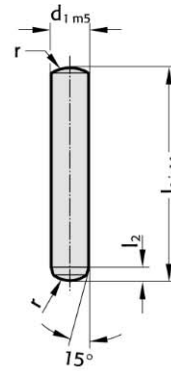

Material:

Steel
Hardness 60 ± 2 HRC

Execution:

Hardened and ground to finest finish.
FIBRO Dowel Pins are manufactured with the exacting requirements of high class diemaking in mind. Whereas DIN EN ISO 8734 stipulates ISO Class 6 for dowels, we produce our pins to m5.

235.1. Dowel pin similar to DIN EN ISO 8734

d_1	l_2	r	l_1	6	8	10	12	14	16	18	20	24	28	32	36	40	45	50	55	60	70	80	90	100	120	130	140
1	0.48	1			•	•	•																				
1.5	0.62	1.6		•	•	•	•	•	•																		
2	0.78	2		•	•	•	•	•	•	•	•	•	•	•	•												
2.5	0.95	2.5		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•							
3	1.1	3		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
4	1.4	4		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
5	1.7	5			•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
6	2.1	6				•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
8	2.6	8					•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
10	3	10						•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
12	3.8	12							•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
14	3.8	16								•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
16	4.7	16									•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
20	6	20										•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•

Ordering Code (example):

Dowel pin similar to DIN EN ISO 8734	=235.1.
Diameter d_1	6 mm = 0600.
Length l_1	10 mm = 010
Order No	=235.1.0600.010