


Dowel pin with internal extracting thread, similar to DIN EN ISO 8735

2361.1.

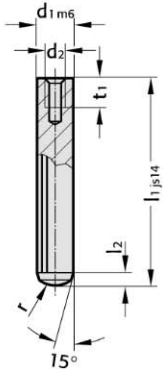

Material:

Steel
Hardness 60 ± 2 HRC



Execution:

Hardened and ground to finest finish.
FIBRO Dowel Pins are manufactured with the exacting requirements of high class diemaking in mind.
FIBRO Dowels with internal extracting thread deviate from DIN in that they are case-hardened and that a smaller thread is used. This increases the crosssection around the threaded hole and thus prevents breaking.

2361.1. Dowel pin with internal extracting thread, similar to DIN EN ISO 8735

d ₁	d ₂	t ₁	l ₂	r	l ₁	8	10	12	14	16	18	20	22	24	26	28	30	32	36	40	45	50	55	60	70	80	90	100	120
4	3	4.5	1.3	4			•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
5	3	6	1.7	5		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
6	4	6	2.1	6				•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
8	5	8	2.6	8					•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
10	6	10	3	10						•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
12	6	10	3.8	12								•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
14	8	12	4	14									•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
16	8	12	4.7	16															•	•	•	•	•	•	•	•	•	•	•
20	10	16	6	20																•	•	•	•	•	•	•	•	•	•

Ordering Code (example):

Dowel pin with internal extracting thread, similar to DIN EN ISO 8735	=2361.1.
Diameter d ₁	10 mm = 1000.
Length l ₁	16 mm = 016
Order No	=2361.1.1000.016