


Ejector pin, hardened, round stepped, DIN ISO 8694



238.1.

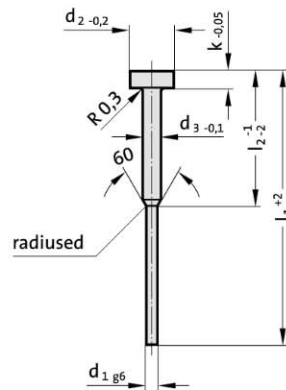

Material:

WS
 Order No **238.1**.
 Hardness:
 Shaft 60 ± 2 HRC
 Head 45 ± 5 HRC

Description of FIBRO materials for tool and die components see at the beginning of Chapter E.

Execution:

Shank hardened and precision ground.
 Head hot upset-forged.

238.1. Ejector pin, hardened, round stepped, DIN ISO 8694

d ₁	d ₂	d ₃	k	l ₁ l ₂	63 30	80 32	100 50	125 50	160 63	200 80
0.8	4	2	2		●	●	●	●	●	
0.9	4	2	2		●	●	●	●	●	
1	4	2	2		●	●	●	●	●	●
1.1	4	2	2		●	●	●	●	●	●
1.2	4	2	2		●	●	●	●	●	●
1.3	4	2	2		●	●	●	●	●	●
1.4	4	2	2		●	●	●	●	●	●
1.5	6	3	3		●	●	●	●	●	●
1.6	6	3	3			●	●	●	●	●
1.7	6	3	3			●	●	●	●	●
1.8	6	3	3			●	●	●	●	●
1.9	6	3	3			●	●	●	●	●
2	6	3	3			●	●	●	●	●
2.1	6	3	3				●	●	●	●
2.2	6	3	3				●	●	●	●
2.3	6	3	3				●	●	●	●
2.4	6	3	3				●	●	●	●
2.5	6	3	3				●	●	●	●

Ordering Code (example):

Ejector pin, hardened, round stepped, DIN ISO 8694	=	238.1 .
Diameter d ₁	1.7 mm =	0170.
Length l ₁	80 mm =	080
Order No	=	238.1.0170.080