


Spring plunger, with spring loaded pin, with slot, increased spring force
 Spring plunger, with spring loaded pin and seal, with hexagon socket, increased spring force

2472.02.

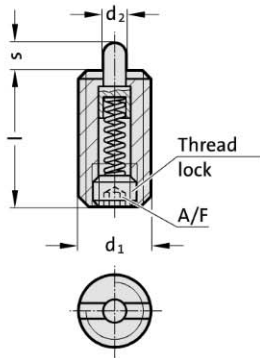

2472.02. Spring plunger, with spring loaded pin, with slot, increased spring force

Order No	d ₁	d ₂	A/F	l	s	Spring force [N]	
						initial	final
2472.02.005	M5	2.4	1.5	18	2.3	11	40
2472.02.006	M6	2.7	2	20	2.5	15	43
2472.02.008	M8	3.5	2.5	22	3	20	75
2472.02.010	M10	4	3	22	3	20	75
2472.02.012	M12	6	4	28	4	45	120
2472.02.016	M16	7.5	5	32	5	64	160
2472.02.020	M20	10	6	40	7	75	195
2472.02.024	M24	12	8	52	10	75	245


Material:

Sleeve: Free machining steel, burnished
 Pin: Free machining steel hardened, burnished
 Spring: Nirosta

Note:

For locking and for pressing upwards or downwards. Removable with hexagon socket screw key or slotted screwdriver.
 Identification of increased spring force by two longitudinal marks on the sleeve.

2472.08.

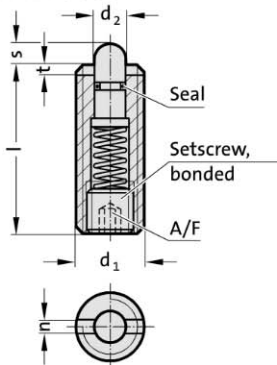

2472.08. Spring plunger, with spring loaded pin and seal, with hexagon socket, increased spring force

Order No	d ₁	d ₂	l	n	s	t	A/F	Spring force [N]	
								initial	final
2472.08.008	M8	3.8	26	1.5	3	1.4	2.5	17	39
2472.08.010	M10	4	28	1.5	3	1.4	3	22	43
2472.08.012	M12	6	35	2.7	4	2	4	40	80
2472.08.016	M16	7.5	40	3.2	5	2.5	5	44	113

Material:

Sleeve: Free machining steel, burnished
 Pin: Free machining steel hardened, burnished
 Spring: Nirosta

Note:

For locking and for pressing upwards or downwards. The seal prevents the ingress of liquids into the forcing pin. Assembly and dismantling using hexagon socket key and slotted screwdriver.
 Temperature operating range: -30°C up to 80°C
 Identification of increased spring force by two longitudinal marks on the sleeve.