

EZ Hose System


EZ Hose System

The EZ Hose System is our most popular Hose System. It is a very compact and versatile O-ring sealed Hose System that allows connections to be tightened by hand. G1/8" and G1/4" connection ports can be connected to the EZ Hose System with the use of an appropriate adapter. A number of different standard hose lengths are available (see table below). Custom hose lengths can also be ordered **from 150 mm upwards**. Subsequent numbers are added to the order number according to the length required, e.g. hose length 2,500 mm = Order No. 4014974-2500


Min. bend radius 20 mm
 Temp. range -20 to + 80°C
 Rupture pressure 2,000 bar
 Max. dynamic working pressure 500 bar



Micro/EZ Hose clip, **Order No. 502646**
 (Can be used to secure hoses using an M5 screw.)

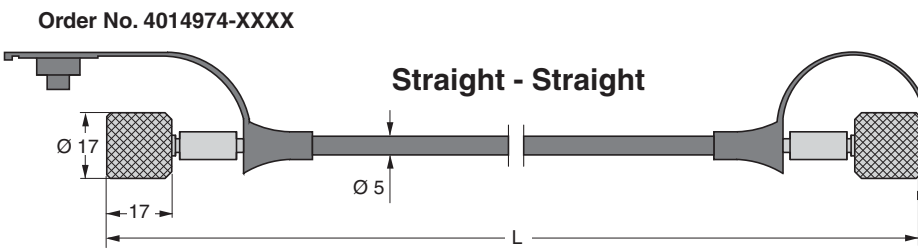


Order No.	L (mm)*
4014974-0200	200
4014974-0300	300
4014974-0400	400
4014974-0630	630
4014974-0800	800
4014974-1000	1000
4014974-1500	1500
4014974-2000	2000
4014974-XXXX**	XXXX

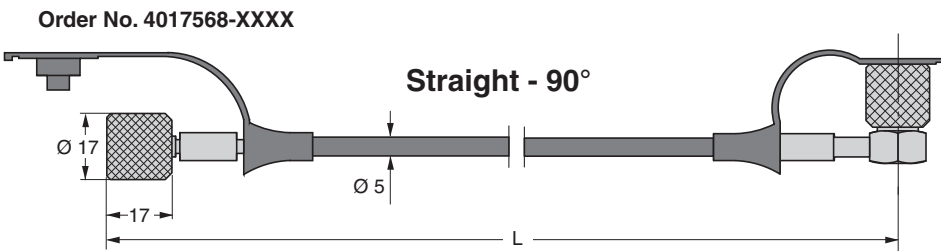

Order No.	L (mm)*
4017568-0200	200
4017568-0300	300
4017568-0400	400
4017568-0630	630
4017568-0800	800
4017568-1000	1000
4017568-1500	1500
4017568-2000	2000
4017568-XXXX**	XXXX

Order No. 4117568-XXXX
 (To avoid twisting the hose, we recommend hose 4017568-XXXX together with angle adapter.)

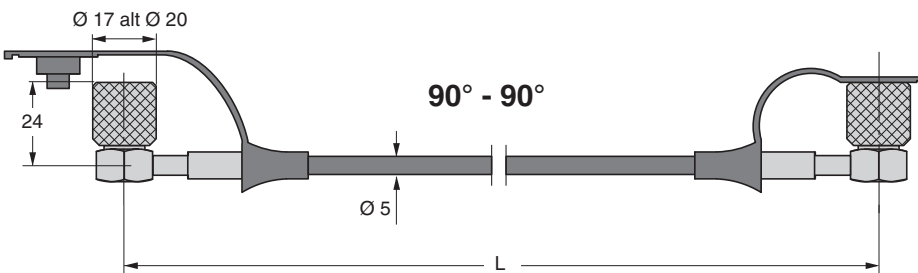

Order No.	L (mm)*
4117568-0200	200
4117568-0300	300
4117568-0400	400
4117568-0630	630
4117568-0800	800
4117568-1000	1000
4117568-1500	1500
4117568-2000	2000
4117568-XXXX**	XXXX

* Minimum recommended L=75
 **For customer specified lengths.