

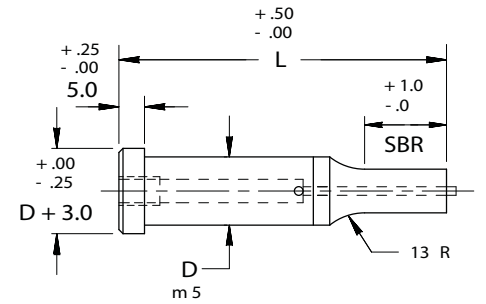


SHOULDER PUNCHES

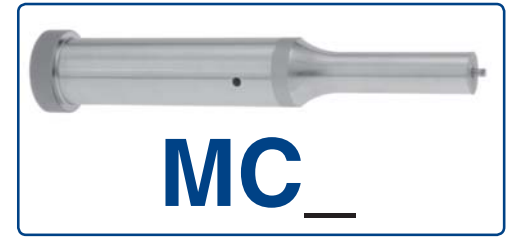

EJECTOR

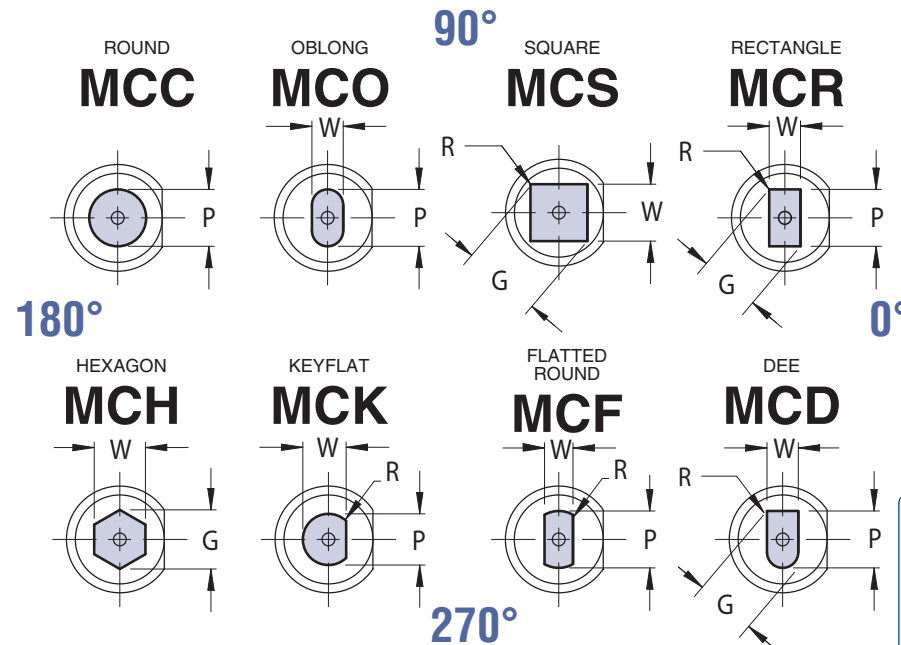

ORDER EXAMPLE:

(Reference page 4)

SPECIFY:	QTY:	TYPE	"D"	"L"	POINT LENGTH	P (OR P&W) DIMENSIONS	ALTERATION CODE	ALTERNATE POINT TOLERANCE
EXAMPLE:	6	MCC	13	90	STD	10.0	F1	STD
EXAMPLE:	6	MCO	16	80	B	13.0 x 9.0	F1	T2

Note: When ordering, standard quantity breaks are: 1, 2-3, 4-11, 12-23, 24-49, 50-99

VIEWS ARE SHOWN LOOKING THROUGH THE SHANK BUT DRAWN WITH SOLID LINES FOR CLARITY.

Complete design & CAD files visit WWW.MOELLERMCD.COM

FOR STANDARD ALTERATIONS SEE PAGES 59-63.

CATALOG TYPE	SHANK DIA D	ROUND	SHAPE		OVERALL LENGTH "L"								
		RANGE P	MIN W	MAX G/P	50	56	60	63	70	71	80	90	100
MC_05	5	1.60 - 4.99	1.60	5.00	X	X	X	X	X	X	X	X	X
MC_06	6	2.50 - 5.99	2.50	6.00	X	X	X	X	X	X	X	X	X
MC_08	8	3.20 - 7.99	3.20	8.00	X	X	X	X	X	X	X	X	X
MC_10	10	4.50 - 9.99	4.50	10.00	X	X	X	X	X	X	X	X	X
MC_13	13	6.00 - 12.99	6.00	13.00	X	X	X	X	X	X	X	X	X
MC_16	16	8.00 - 15.99	7.50	16.00	X	X	X	X	X	X	X	X	X
MC_20	20	10.00 - 19.99	8.00	20.00		X	X	X	X	X	X	X	X
MC_25	25	12.00 - 24.99	9.00	25.00		X	X	X	X	X	X	X	X
MC_32	32	16.00 - 31.99	10.00	32.00				X	X	X	X	X	X
MC_40	40	30.00 - 39.99	14.00	40.00							X	X	X

NOTE: FOR EXTENDED RANGE SHANK DIAMETERS OF 45, 50, 56 & 63, SEE PAGE NO. 20, 21

Material

Steel: M2, HRC 60-63
Heads HRC 45-55

Standard Point Tolerance

Round P	+ .01 - .00		.01	P to D
Shape P, W ±	.01		.02	P to D

Alternate Point Tolerance

T2

P, W TOLERANCE	+ .005 - .000
P to D	.008

CATALOG TYPE	SHANK D	SBR			EJECTOR SIZE
		NAPMA	ALTERNATES		
		STD	B	C	
MC_05	5	13	10	—	MAE 2
MC_06	6	13	10	—	MAE 3
MC_08	8	19	13	—	MAE 4
MC_10	10	19	13	25	MAE 5
MC_13	13	19	13	25	MAE 5
MC_16	16	19	13	25	MAE 6
MC_20	20	19	13	25	MAE 6
MC_25	25	19	13	25	MAE 6
MC_32	32	25	19	30	MAE 6
MC_40	40	25	19	30	MAE 6

STANDARD FLAT LOCATION IS AT 0° AS SHOWN.

AVAILABLE AT 90°, 180°, 270°, FOR SAME ALTERATION PRICE.

L=50 SBR MAX=13
L=56 SBR MAX=19

L=60 SBR MAX=19
L=63 SBR MAX=25