


PRESS-FIT BUTTONS



COUNTER BORE RELIEF/EXTENDED RANGE

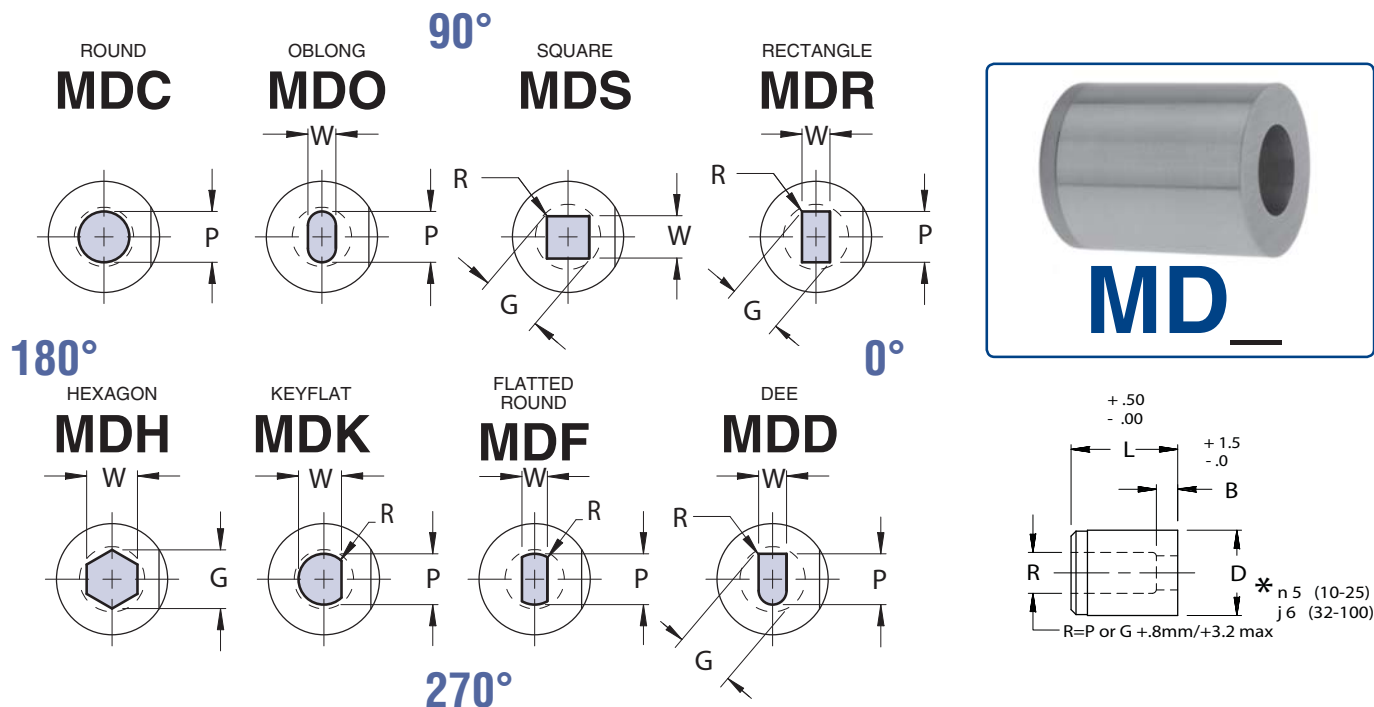

VIEWS ARE SHOWN LOOKING AT TOP FACE OF BUTTON.

Complete design & CAD files visit WWW.MOELLERMCAD.COM

CATALOG TYPE	BODY DIA D	LAND LENGTH "B"			MAX DIA R	ROUND RANGE P	SHAPE		OVERALL LENGTH "L"					
		STD	ALT A	ALT B			MIN W	MAX G/P	22	25	28	30	32	35
MD_45	45	8.0	12.0	20.0	36.0	17.50 - 35.00	7.50	35.00	X	X	X	X	X	X
MD_50	50	8.0	12.0	20.0	41.0	20.00 - 40.00	8.00	40.00	X	X	X	X	X	X
MD_56	56	8.0	12.0	20.0	46.0	22.50 - 45.00	9.00	45.00	X	X	X	X	X	X
MD_63	63	8.0	12.0	20.0	51.0	25.00 - 50.00	10.00	50.00	X	X	X	X	X	X
MD_71	71	8.0	12.0	20.0	57.0	27.50 - 56.00	11.00	56.00	X	X	X	X	X	X

Material

Steel: A2, HRC 58-60
Alternate M2, HRC 60-63

Standard Point Tolerance

Round P $\begin{matrix} +.01 \\ -.00 \end{matrix}$.01 P to D
Shape P, W $\begin{matrix} +.02 \\ -.0 \end{matrix}$.02 P to D

STANDARD FLAT LOCATION IS AT 0° AS SHOWN.
AVAILABLE AT 90°, 180°, 270°, FOR SAME ALTERATION PRICE.

ORDER EXAMPLE:

(Reference page 4)

SPECIFY:	QTY:	TYPE	"D"	"L"	LAND LENGTH "B"	P (OR P&W)	ALTERATION	STEEL
					DIMENSIONS	CODE		
EXAMPLE:	6	MDC	50	30	A	35.0	F2	A-2
EXAMPLE:	6	MDO	63	25	STD	42.5 x 18.3	F2	M2

Note: When ordering, standard quantity breaks are: 1, 2-3, 4-11, 12-23, 24-49, 50-99

FOR SLUG CONTROL AND
STANDARD ALTERATIONS SEE PAGES 59-63.