


TRUE SET STRIPPERS



- Innovative One-Piece construction
- Patented cost savings “Snap in” retention feature
- Interchangeable and complies with NAAMS standards
- Precision machined to assure perpendicularity resulting in prolonged Urethane life

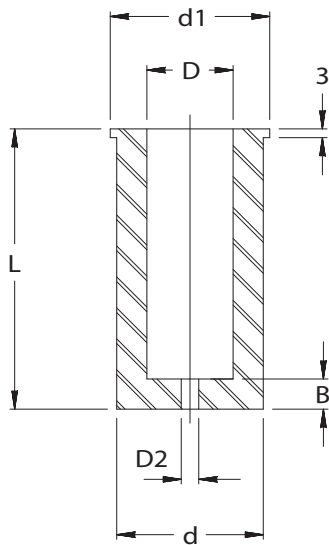

URETHANE HARDNESS 95 SHORE A

Heavy Duty Ball Lock Punch Length	Light Duty Ball Lock Punch Length	Recommended Stripper Length "L"
80	71	43
90	80	52
100	90	63
110	100	72

Moeller reserves the right to modify, correct or improve this literature or products without notice.

URETHANE STRIPPERS

Stripper Catalog Number	Punch Shank	Press Fit D	d	L	d1	d2	b
MTS10-43 *44	10	9.75	18	44	21	1.6	6
MTS10-52 *54	10	9.75	18	54	21	1.6	6
MTS10-63 *64	10	9.75	18	64	21	1.6	6
MTS10-72 *74	10	9.75	18	74	21	1.6	6
MTS13-43 *44	13	12.75	23	44	26	3.0	6
MTS13-52 *54	13	12.75	23	54	26	3.0	6
MTS13-63 *64	13	12.75	23	64	26	3.0	6
MTS13-72 *74	13	12.75	23	74	26	3.0	6
MTS16-43 *44	16	15.75	28	44	31	3.0	6
MTS16-52 *54	16	15.75	28	54	31	3.0	6
MTS16-63 *64	16	15.75	28	64	31	3.0	6
MTS16-72 *74	16	15.75	28	74	31	3.0	6
MTS20-43 *44	20	19.75	33	44	36	3.0	7
MTS20-52 *54	20	19.75	33	54	36	3.0	7
MTS20-63 *64	20	19.75	33	64	36	3.0	7
MTS20-72 *74	20	19.75	33	74	36	3.0	7
MTS25-43 *44	25	24.75	40	44	43	3.0	7
MTS25-52 *54	25	24.75	40	54	43	3.0	7
MTS25-63 *64	25	24.75	40	64	43	3.0	7
MTS25-72 *74	25	24.75	40	74	43	3.0	7
MTS32-43 *44	32	31.70	50	44	55	3.0	7
MTS32-52 *54	32	31.70	50	54	55	3.0	7
MTS32-63 *64	32	31.70	50	64	55	3.0	7
MTS32-72 *74	32	31.70	50	74	55	3.0	7
MTS40-43 *44	40	39.70	60	44	65	3.0	8
MTS40-63 *64	40	39.70	60	64	65	3.0	8