



Guide bush with collar, Bronze with solid lubricant


2087.70. Guide bush with collar, Bronze with solid lubricant

d_1	9 10	14 15	18 20	22 24	30 32	40 42
d_2	14	20	26	30	42	54
d_3	16	25	31	35	47	60
l_3	3	6	6	6	6	10
l_4	1.5	2	2	3	4	5
l_5	3	6	8	8	8	12
r	0.5	1	2	3	3	3

l_1 l_2						
15 12	●					
20 17	●					
25 22	●					
30 27	●					
39 36	●					
49 46	●					
59 56	●					
69 66	●					
23 17		●				
28 22		●				
33 27		●				
42 36		●				
52 46		●				
62 56		●				
72 66		●				
82 76		●				
92 86		●				
25 17			●	●		
30 22			●	●		
35 27			●	●	●	
44 36			●	●	●	
54 46			●	●	●	
64 56			●	●	●	
74 66			●	●	●	
84 76			●	●	●	
94 86			●	●	●	
104 96			●	●	●	
124 116			●	●	●	
144 136			●	●	●	
164 156			●	●	●	
58 46						●
68 56						●
78 66						●
88 76						●
98 86						●
108 96						●
128 116						●
148 136						●
168 156						●
208 196						●



2087.70.

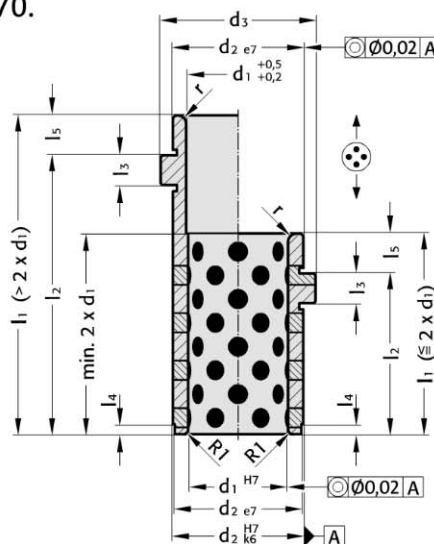

Material:

Bronze with solid lubricant, oilless lubricating.

Note:

Assembly guide lines / Dimensional requirements and tolerances at the end of chapter D.

Attention:

Bushes can only be used with axial motion!

Ordering Code (example):

Guide bush with collar, Bronze with solid lubricant		=2087.70.
Guide diameter d_1	22 mm =	022.
Length with collar l_2	17 mm =	017
Order No		=2087.70. 022. 017